


Calibre No. 3703B	Jewels 16j	Style Name
⇨ Basic Calibre 37A 16J Catalog No. 37-00-1		



Cal. 3703B

Characteristics

- Electronic watch
(Non-contact points balance driven system)
- Casing diameter : 29.00 ϕ mm
- Maximum height : 6.60 mm
- Vibrations per hour : 21,600
- Sweep second
- Calendar (day & date)
- Instant date setting
- Second-setting device (Power supply switch)
- "Diashock" Shock Resistant Device

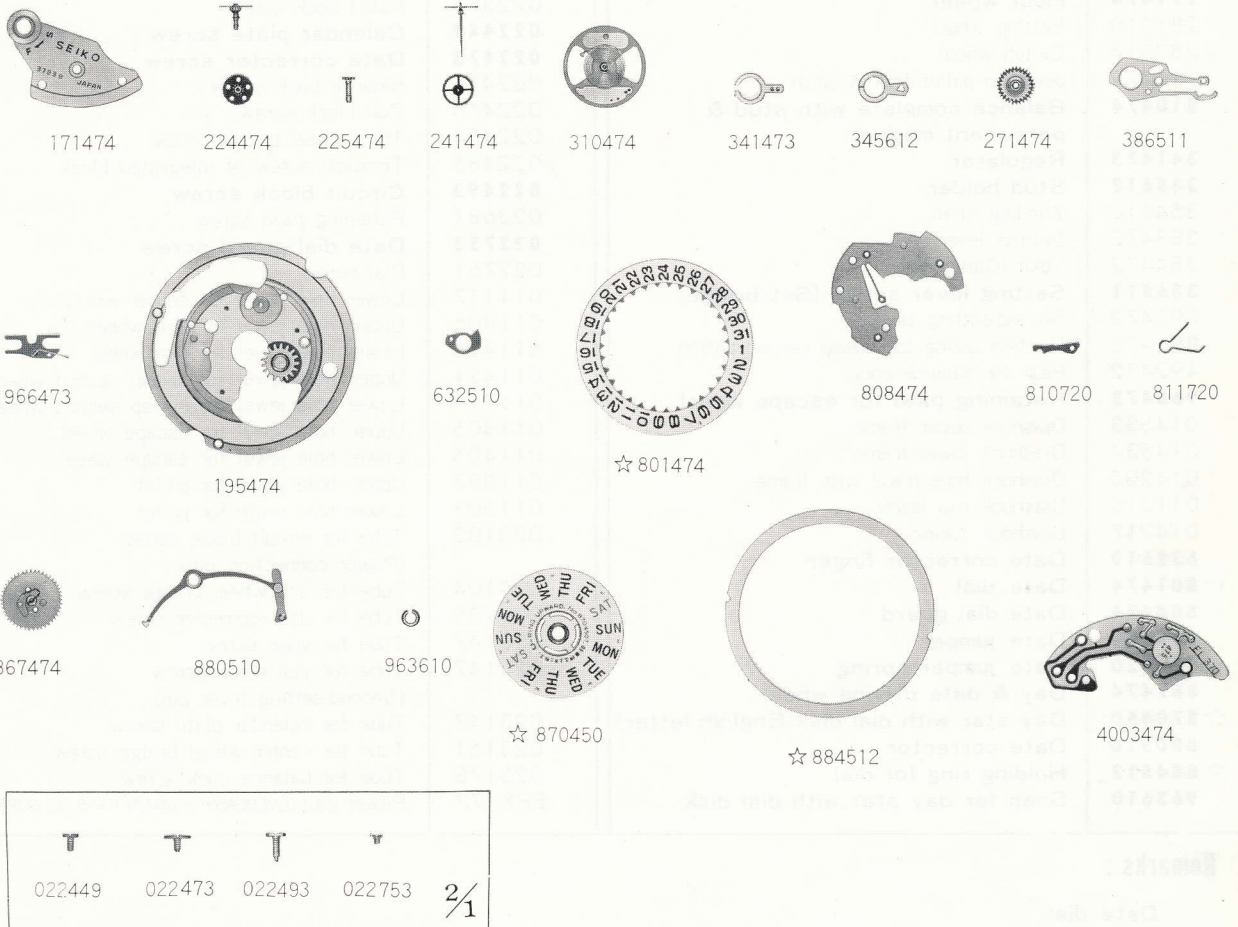

Calibre No. <div style="font-size: 2em; font-weight: bold; text-align: center;">3703B</div>	Jewels <div style="font-size: 2em; font-weight: bold; text-align: center;">16j</div>	Style Name
⇨ Basic Calibre 37A 16J Catalog No. 37-00-1		

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
122472	Center wheel bridge	4002472	Coil block
131472	Third wheel bridge	4003474	Circuit block
161472	Pallet cock	4216591	Insulator for power connection
171474	Balance cock	4219472	Insulating pipe for power connection
195474	Calendar plate	4270472	Power connection
224474	Center wheel & pinion with cannon pinion	4414472	Insulating cap for power cell
225474	Cannon pinion	022150	Stud screw
231510	Third wheel & pinion	022251	Friction spring screw for sweep second pinion
241474	Sweep second wheel & pinion	022351	Center wheel bridge screw
251472	Escape wheel & pinion	022362	Yoke screw (Clutch lever screw)
261510	Minute wheel	022375	Setting lever spring screw
271474	Hour wheel	022376	Pallet cock screw
281510	Setting wheel	022449	Calendar plate screw
282514	Clutch wheel	022473	Date corrector screw
301472	Jewelled pallet fork & staff	022476	Balance cock screw
310474	Balance complete with stud & permanent magnet	022476	Coil block screw
341473	Regulator	022484	Third wheel bridge screw
345612	Stud holder	022486	Terminal screw of integrated block
354510	Winding stem	022493	Circuit block screw
383472	Setting lever with axle	022687	Retaining pawl screw
384472	Yoke (Clutch lever)	022753	Date dial guard screw
386511	Setting lever spring (Set bridge)	022761	Dial screw
391472	Second-setting lever	011117	Lower hole jewel for center wheel
396472	Friction spring for sweep second pinion	011406	Upper hole jewel for 3rd wheel
492472	Rest for balance cock	011406	Lower hole jewel for 3rd wheel
966473	Retaining pawl for escape wheel	011421	Upper hole jewel for sweep second wheel
014533	Diashock upper frame	011719	Lower hole jewel for sweep second wheel
014534	Diashock lower frame	011405	Upper hole jewel for escape wheel
014225	Diashock hole jewel with frame	011405	Lower hole jewel for escape wheel
011210	Diashock cap jewel	011503	Upper hole jewel for pallet
014217	Diashock spring	011503	Lower hole jewel for pallet
632510	Date corrector finger	023103	Tube for circuit block screw (Power connection pin)
☆ 801474	Date dial	023104	Tube for 3rd wheel bridge screw
808474	Date dial guard	023105	Tube for date corrector screw
810720	Date jumper	023147	Tube for yoke screw
811720	Date jumper spring	023147	Tube for coil block screw (Second-setting lever pin)
867474	Day & date driving wheel	023147	Tube for calendar plate screw
☆ 870450	Day star with dial disk(English letter)	023147	Tube for center wheel bridge screw
880510	Date corrector	023151	Tube for balance cock screw
☆ 884512	Holding ring for dial	023178	Power cell (EVEREADY - UNION CARBIDE CORP.)
963610	Snap for day star with dial disk	EPX-77	

Remarks :

Date dial

☆ 801474(Black figures on white background) Used when the crown is located at **4** o'clock and the date frame at **3** o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Day star with dial disk

☆ 870450(English letter) Used when the crown is located at **4** o'clock and the day frame at **3** o'clock.

If the day star with dial disk is required in any other type, specify the number printed on the disk.

Holding ring for dial — Measure the total thickness and the outside diameter. —————

☆ 884512.....0.8 mm total thickness and 27.30 ϕ mm outside diameter.

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆⇨ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. **37A** 16J Catalog No. 37-00-1 Green page).